

T-CHARGE BY



R.F.U. DISCHARGE INK

DESCRIPTION

T-CHARGE is a bright, Ready-For-Use, discharge ink. It can be used straight from the container as a water-base ink or add D-Powder to discharge. The colors can be mixed together to match a wide range of shades according to CCI's Color Matching System. T-CHARGE can be used in conjunction with other ink systems to produce multiple effects. T-CHARGE's rheology and flow characteristics allow it to be printed with high mesh counts. This produces very fine image detail and a softer finish.

QUICK TIPS

- Activate only enough ink for the current job.
- Misting the screen, with water, during high production runs will keep the ink from drying out.

ADVANTAGES

- High Opacity
- Extremely Bright And Crisp Colors
- Low Odor
- PVC & Phthalate Free
- Superior Color / Wash Fastness
- Easy to use - Medium Viscosity
- Dry Cleaning / Ironing Resistant
- Does not "Dry-Out" on the Screen
- Long Pot Life / up to 24 Hours (Activated)
- Easy Clean-Up
- Recommend Mesh / Fabric = 110.80 to 230.48 t/in

PREPARATION

Screens must be prepared with a water-resist emulsion to prevent stencil breakdown on press. Post-hardening the stencil is recommended for long print runs. Stir in 3-5%, by weight, D-Powder Discharge Activator and mix well. Different percentages of the Activator will affect the discharge results; increase or decrease in order to achieve desired results. Mix only enough for current production requirements. Activated T-CHARGE should be used within 8 hours. T-CHARGE may be thinned with water, if a lower viscosity is required, up to 10% max.

APPLICATION

The mesh/fabric count that is being used will determine how much squeegee pressure should be used. Typically heavy squeegee pressure is preferred. Flash between each color wherever possible to reduce ink build-up. Misting the on-press screens occasionally with water during long print runs is helpful. The printed fabric should be cured for a minimum of 90 seconds at 320 °F. Ideally the printed fabric should be cured for 2-3 minutes at 340-350°F. High volume forced air is recommended during curing. Do not allow the print to dry before curing in an oven; the more moisture available, the better discharge result. Proper curing is extremely important. Degree of discharging and color/wash fastness is dependent on proper curing. The activator will give off a strong odor, this is normal. Heat curing must be complete in order to assure the fabric does not retain the activator odor, re-curing may be required. Add CCI's EnviroLine® Retarder up to 5% to provide more open time of the wet ink to prevent drying in the screens.

WASH-UP


General wash-up, on ink that has not dried up, can be done with water. CCI's EnviroSolv® should be used for an on-press cleaner and screen opener. Specialty products like CCI's WB-1 are ideal for dried up ink and tough haze stains left behind on the fabric.

NOTE

Always pre-test for complete cure, durability, and other specific requirements. Not all fabrics are dyed with dischargeable dyes. Pigments must be stable with the discharge activator. Not all pigments will discharge. Certain chemical residues may remain on the printed fabrics. Fabric printed with T-CHARGE should be either washed before packaging, or labeled accordingly to alert the buyer or customer that the garment should be washed prior to use.

PACKAGING

8 oz., 16 oz., 1 QT., 1 Gal., 5 Gal., 55 Gal.

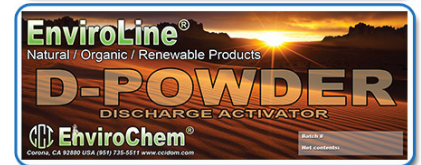

EnviroLine®
Natural / Organic / Renewable Products



www.ccidom.com

1850 Wild Turkey Circle Corona, CA 92880 USA (800) 753-5095

THIS PRODUCT IS BROUGHT TO YOU BY

NAZDAR
SOURCE ONE

VISIT US ONLINE
SourceOne.Nazdar.com

CALL US
888-578-5713

© 2022 Nazdar. All Rights Reserved.
Specifications subject to change without notice.